

32" HD Medical Display




FSN Medical Technologies has solutions for managing your operating room video signals. Our products are engineered and built for compatibility with other highly specialized surgical and diagnostic equipment used in surgical suites, operating rooms, emergency rooms, and procedural facilities. FS-L3201D, our 32" medical display, is uniquely equipped to handle tasks in the demanding OR environment.

- Rapid signal detection, robust mode tables
- Artifact-free HD images
- Fanless - sterile field compatible
- Built to last, rugged aluminum housing
- Calibrated to clinical color
- Image pan, zoom, freeze, picture-in-picture




FSN's 32" display features rapid signal detection of video sources found in the today's operating rooms and surgical suites. FS-L3201D is ideal for showing high detail images, yet is still within the size range recommended by most support boom arm systems. Handheld remote control is included.

Accurate Color Reproduction

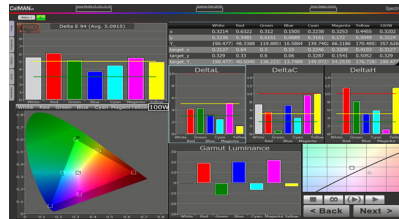

FSN has implemented methods to fine-tune the properties of our displays. Distinct color space settings have been calibrated to well-known surgical color preferences.

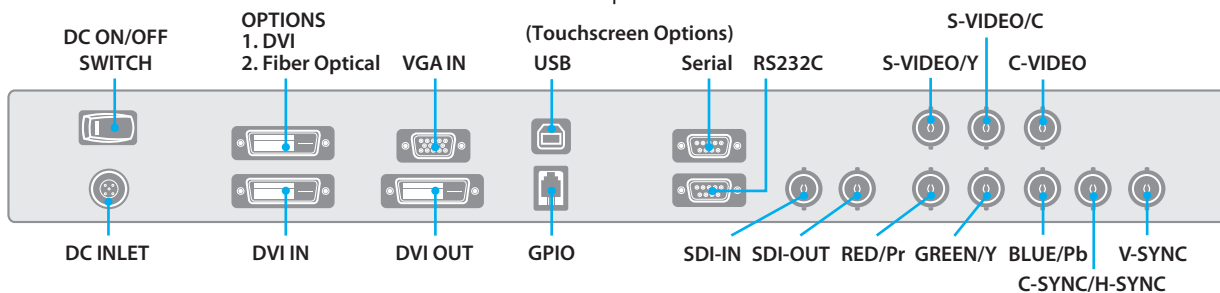

FSN displays have the connections you need. All major inputs are accepted via the back side connection panel.

Specifications






General Features

Item	Description
Panel	32 inch TFT LCD (IPS)
Resolution	1920 x 1080 (HD 1080)
Aspect Ratio	16 : 9
Active Area	698.40 X 392.85 mm
Input Signal	1 x DVI-D 1 1 x DVI-D 2 (optical fiber optional) 1 x VGA (D-sub) 1 x SD/HD/3G-SDI (BNC) 1 x C-Video (BNC) 2 x S-Video (Y/C) (BNC) 1 x Component (RGBS, YPbPr) (5 x BNC)
TOUCH (optional)	(Note: Depth and weight will increase)
GPIO port	Swap, PIP / PBP1 / PBP2 Select, Record indicator
Output Signal	1 x DVI-D, 1 x SD/HD/3G-SDI (BNC)
Power Supply	AC/DC Adaptor (AC 100~240V, DC 24V 6.25A)
Control Key	Power, Menu, PIP, Up, Down, Plus, Minus, Input
Unit Dimension	795(W) x 485(H) x 100(D) mm 31.30(W) x 19.09(H) x 3.94(D) inch
Average Brightness	500 (5 points avg.) cd/m2
Response Time (G-to-G)	6 ms (avg.)
Viewing Angle (CR>10)	R/L 178, U/D 178
Weight	15.8 kg, 34.8 lbs
Contrast Ratio	1300 : 1 typical
Pixel Pitch	0.363 x 0.363

Signal Timing

Input Signal	Type	Description
VGA	Type	Analog RGB
	Connector	DSUB-15
	Level	0.7Vp-p ±5%
	Polarity	Positive
	Impedance	75 ohm ±5%
	Horizontal frequency	30 ~ 93KHz
	Vertical frequency	50 ~ 85Hz
	Applicable maximum pixel frequency	170MHz
	Type	Separate H/V sync, Composite H/V sync, Sync On Green Automatic synchronization without external switch
	Terminal resistance	more than 2KΩ
DVI	Type	Digital RGB
	Signal Format	TMDS single link
Optical DVI	Connector	DVI-D
	Type	Digital RGB
CVBS	Signal Format	Fiber Optic Transmission
	Type	C-Video
	Color system	NTSC, PAL
SVHS Y/C	Signal Format	Composite Video Signal
	Type	S-Video
	Color system	NTSC, PAL
SDI	Signal Format	Y/C Separated Video Signal
	SMPTE-274M	1080i (60 / 59.94 / 50)
	SMPTE-296M	1080p (30 / 29.97 / 25 / 24 / 24sF / 23.98 / 23.98sF)
	SMPTE-260M	720p (60 / 59.94 / 50)
	SMPTE-125M	1035i (60 / 59.94)
	ITU-R BT.656	480i (59.94)

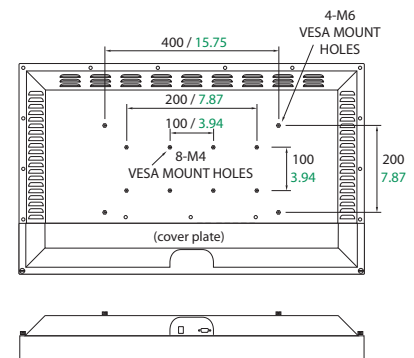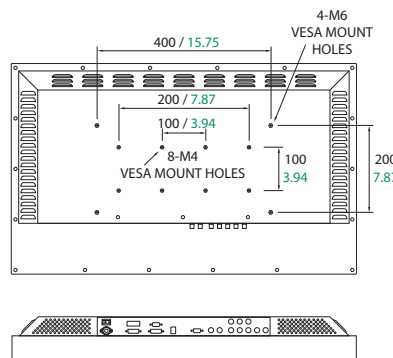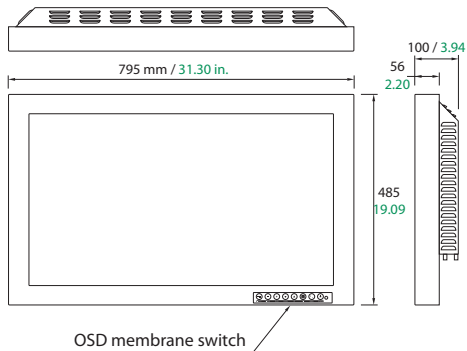

Specifications are subject to change with or without notice. Doc. # FSN1930 Rev. 8/14

www.fsnmed.com

Foreseeson Custom Displays, Inc.
2210 E. Winston Road
Anaheim, CA 92806 USA
Tel: 714-300-0540
Fax: 714-300-0546

Fort Lee, New Jersey
Tel: 201-849-4495
Atlanta, Georgia
Tel: 770-871-1895
Orlando, Florida
Tel: 407-667-3586

Foreseeson Korea
404B, PangyoInnovallley B
253 Pangyo-ro
Bundang-gu Seongnam-si
Gyeonggi-do, Korea 463-400
Tel: +82-31-8018-0780
Fax: +82-31-8018-0786

Foreseeson GmbH
Industriestrasse 38a
63150 Heusenstamm, Germany
Tel: +49 6104 64398 0
Fax: +49 6104 64398 11

Foreseeson UK Ltd.
Unit 2 Kingsmill Business Park
Chapel Mill Road
Kingston upon Thames, Surrey KT1 3GZ
Tel: +44 (0) 208 546 1047
Fax: +44 (0) 208 546 3931