


**Patient Monitoring and Medical Modality LCD Series**      15"      19"



- Medically Certified
- Touch Interface Options
- Available in 15" and 19"
- Integrated Speakers
- Color: 15" White/19" Beige
- Cost effective replacement

This medically certified LCD display series is designed to meet the needs of clinicians performing patient monitoring or control of modality tasks in a hospital setting. These display solutions include touch screen interface options. These displays enhance the quality of care throughout your medical facility.

Hospitals and clinics will find these displays to be a cost effective replacement alternative for existing patient monitoring and modality system equipment.

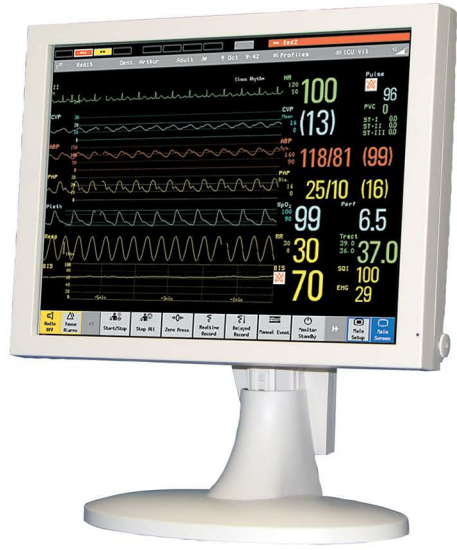

We understand that replacing or upgrading displays in a medical environment can often be challenging and confusing for many end users. Our experts are available to consult and recommend solutions to meet your patient and department needs. In addition, these displays are backed by best-in-class service and support.

## Specifications & Features

15"

19"

Model / Type	ROM1532CM-R	GOV950AM
LCD Size	15" / 38.1 cm	19" / 48.3 cm
Standard Resolution	1024 x 768	1280 x 1024
Custom Resolution	Upon Request	1024 x 512
Pixel Pitch	0.297 mm	0.294 mm
Brightness (Typical)	250 cd/m <sup>2</sup>	300 cd/m <sup>2</sup>
Contrast Ratio (Typical)	700:1	1000:1
Response Time (Typical)	16 ms	20 ms
Viewable Area	304.1 x 228.1mm	396.3 x 301.0mm
Viewing Angle (H x V)	160(H) / 140(V)	± 89 degrees / ± 89 degrees
Color Depth	16.7M	16.770M
Input Signal	VGA / DVI	VGA / DVI
Input Connector	15 pin D-Sub / DVI-D	15 pin D-Sub / DVI-D
Power Supply Input (External)	100 - 250V @ 60/50 Hz	100 - 250V @ 60/50 Hz
Power Supply Output (External)	12V / 3.0A max.	12V / 5.0A max.
Power Consumption	<50W	60W
Tilt Stand	Included	Included
Dimensions with Stand (HxWxD)	347.5 x 355.8 x 175 mm	467 x 432 x 251 mm
VESA Mounting	75 mm	100 mm
Gross Weight	4.7 kg	9.94 kg
Speakers	Integrated	Integrated
Touch Ready	Resistive- 5 Wire, RS232/USB	Surface Acoustic Wave, Resistive
Protective Shield	None	Optional
Enclosure Color	White	Beige
Certifications	UL/cUL (60601 3 <sup>rd</sup> ) , CB (60601 3 <sup>rd</sup> ) , CE, FCC	UL/CSA 60950-1 , UL/CSA 60601-1 , CE, FCC-B

These displays are compatible with a variety of equipment used in hospitals including:

- Patient Monitoring
- Modality Control

Contact your representative for details.

### Hassle-Free Services & Support

Overcome technical challenges with our team of experienced engineers and technicians. Whether it's a simple answer or on-site troubleshooting, we can help any time, every time. Accurate and consistent presentation of images is a critical requirement for radiology displays.



**DBI Service Desk**  
Comprehensive  
Technical Support



**Hot Swap**  
Extended Warranty &  
Advanced Replacement Program

[www.doubleblackimaging.com/servicedesk](http://www.doubleblackimaging.com/servicedesk)



**DOUBLE BLACK**  
IMAGING

[www.doubleblackimaging.com](http://www.doubleblackimaging.com) | 303-404-2222

2017 Double Black Imaging | All brands and trademarks are the property of their respective owners.

Specifications are subject to change without notice.