



8MP Large Format System Optimized for Diagnostic Imaging

Space and Productivity Multiplied

Our Gemini Series color LED backlit systems/solutions double the resolution and eliminate the gap between screens in multi-head display configurations. Allowing the eye to seamlessly glide between images uninterrupted increases productivity and user efficiency. Complete with advanced auto-calibration technology, these wide-screen models enable multi-modality imaging from a single display on this 8MP model.

The entire Gemini series of large format, wide-screen displays are equipped with built in front sensors for hands-free automatic DICOM 3.14 calibration, backlight sensors to maintain stability over time, ambient light sensors, a presence sensor, auto-report generation and non-conformance alerts via the web.

Additional user friendly features include auto-dimming capability, image pinpointing, cursor wrap, and cursor genie functions – improving workflow and enhancing the user experience.

About Double Black Imaging and our Image Systems Display Division


We are proud to be the largest display supplier and calibration software developer, creating 100% of our software and performing 100% display system integration in the USA.

Our team has a renowned history of providing the industry's finest customer service, continually acknowledged by thousands of users and IT Professionals who put their trust in us every day.

We are dedicated to developing innovative imaging solutions that greatly improve image quality and stability. Making imaging more efficient and reducing costs are the cornerstones of what DBI stands for.



Automatic DICOM Calibration with CFS™

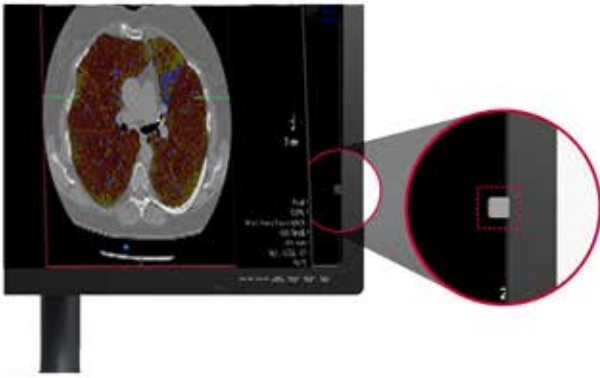

Built in front sensors eliminate the need for bulky photometers and manual, time-consuming calibration and conformance testing. All DBI systems/solutions are bundled with the CFS™ Calibration software suite for automatic DICOM calibration, conformance testing, report generation, reporting and non-conformance alerts via the web.

CFS™ Calibration Software Suite:

- Ensures compliance to the DICOM 3.14 Standard
- Includes Local client and CFS WebManager
- Included with all DBI Display Solutions
- Email Alerting for proactive workstation maintenance
- In depth reporting tools including DICOM, NYC, NYS and Joint Commission specific reports
- Developed by Double Black Imaging 100% in the USA
- Includes Productivity Toolkit

Icon	Attached Monitors	Most Recent Activity	Workgroup	Work Station	Network ID
	1. In full compliance 2. Navigation Panel	Current	PlymouthEng	JMS L8816	IC04220039
	1. In full compliance 2. In full compliance	3 days ago on 11/22/15	44-Office Test Area	MSPHNT	ANAS-WNT0
	1. In full compliance 2. In full compliance	4 days ago on 11/22/15	44-Office Test Area	CK3P RLED	ANAS-WNT
	1. Navigation Panel 2. Navigation Panel	23 hours ago	PlymouthLAB	HP X05402	SAMYS-PLYMO/TH
	1. In full compliance 2. In full compliance	24 hours ago	PlymouthLAB	Del Precision T800 (258 757 241)	SAMYSLAB
	1. Navigation Panel 2. Navigation Panel	Current	DBICodeal	N/A	DBICEL
	1. In full compliance 2. In full compliance	2 days ago on 11/24/15	DBICORP	DBHPL421114	DBHPL421114HP
	1. In full compliance 2. Ledscreen	17 weeks ago on 11/25/13	DBIConference Room	DBHPL500	DBHPL500PLC
	1. In full compliance	17 weeks ago on 11/25/13	DBIConference Room	DBH420WT4P	DBH420WT4P

Multi-Modality Imaging

Optimizing Workflow by Enabling most modalities to be read at one workstation is a key feature of the Gemini 8MP+. The Gemini 8MP+ precisely accommodates the spectrum of modality resolutions by toggling between 8MP, 6MP and 4MP display options.



Lighting to Reduce Eye Strain

The Gemini 8MP+ is equipped with built in private ambient lights to illuminate the reading station desk and/or wall. The adjustable built in lighting system allows the radiologist to work effectively and comfortably while reducing fatigue and eye strain.




Productivity Tool Kit

The inclusive CFS Productivity toolkit consists of several utilities designed to improve User workflow, enhance visual clarity, reduce distraction, minimize hand strain, fatigue, frustration, and ultimately diminish visual strain.




Red arrows are sources of Disability Glare & Discomfort Glare

Eliminates distractions and eye strain from bright neighboring monitors




AUTO DIM FEATURE



CURSOR GENIE

Saves time and the frustration of a user's cursor getting stuck in the corners of a display



PINPOINT




Enables the user to concentrate on key areas of interest



CURSOR WRAP



Allows the user to quickly move between screens in a multi-display environment, reducing hand strain



CURSOR LOCATOR



Rapidly locates the cursor and allows the user return to work quickly without frustration

Ergonomically Designed

The Gemini 8MP+ is ergonomically designed to reduce strain and fatigue caused by long hours at the workstation. This stand allows users to freely adjust the tilt, height, and swivel.



Display Bundle Options



Take Advantage of our direct relationships for workstations. DBI will preconfigure all displays, graphic controllers and calibration software prior to shipment.

Ergonomic Seating Reduces back pain and improves productivity by promoting proper alignment.

Ergonomic Workstation options include: Configurable workstations, Sit to stand Modules, Monitor mounts and more!


G-Series - Technical Specifications



Specifications	8G+
Size and Aspect Ratio	31.5"; 16:9 Aspect Ratio
Active Display Area H x V	27.52" x 15.5"
Resolution	3840 x 2160 (8MP)
Brightness	1000cd/m ² ; 350-600 cd/m ² Calibrated Brightness (user defined)
Contrast Ratio	2000:1 Typ.
Look Up Table	10-Bit LUT (8Bit + A-FRC)
Response Time	14 ms
Pixel Pitch	0.1816mm x 0.1816mm
Built In Sensors	Front Sensor, Backlight Sensor, Ambient Light Sensor, Presence Sensor
Display Modes	Multi-resolution Mode (8/6/4MP), Focus View Mode, Light Box Mode, Pathology Mode
Panel Technology	TFT AMLCD IPS Black, LED Backlit
Surface Treatment	Anti-Reflective, 3H
DICOM Calibration	Yes with Built in Front Sensors Via CFS. Includes DICOM reporting, alerting and CFS Web Manager
Applications	Multi-Modality PACS, CR/DR, CT, MRI, US, DSI, DSA, PET/CT, Image Fusion, X-Ray, Nuclear Medicine
Viewing Angle	178° Typical
Video Input / USB (1up 1down)	DisplayPort (2), USB 3.0 (2 Up, 2 Down)
Power Supply	External for added reliability. AC Input to power brick: 100-240V
Tilt/Swivel/Height Adjustment	-5 to + 15° Tilt +/- 15° Swivel 110mm Height Adjustment
Weight w/ stand (approx)	28.6 lbs w/Stand; 21.3 lbs w/o Stand
Dimensions (W x H x D)	29.9" x 25.4" x 8.76" With Stand 29.9" x 18.3" x 3.1" Without Stand
Mounting Options	100 x 100 mm VESA
Safety & Emissions	IEC (IEC 60601-1 / IEC 60601-1-2), EN (EN 60601-1 / EN 60601-1-2), IEC (IEC 60950-1 / IEC 55032, 55024), EN (EN 60950-1 / EN 55032, 55024), cUL (ANSI/AAMI ES 60601-1, CSA CAN/CSA-C22.2 NO. 60601-1), FCC (FCC part 15), ISO13485, GMP, KGMP, WEEE, MFDS, FDA 510(k) Class II
Warranty	5-Year Warranty with Hot Swap is standard

Calibration Feedback System – CFS™

- Our industry leading CFS™ software - Client and Web Manager
- Ensures calibration and confidence to DICOM 3.14
- Provides tools to enhance visibility, efficiency, workflow
- Enables performance monitoring and asset management
- Accurate calibration of both color and gray shades
- CFS™ Software comes standard with every G-Series display

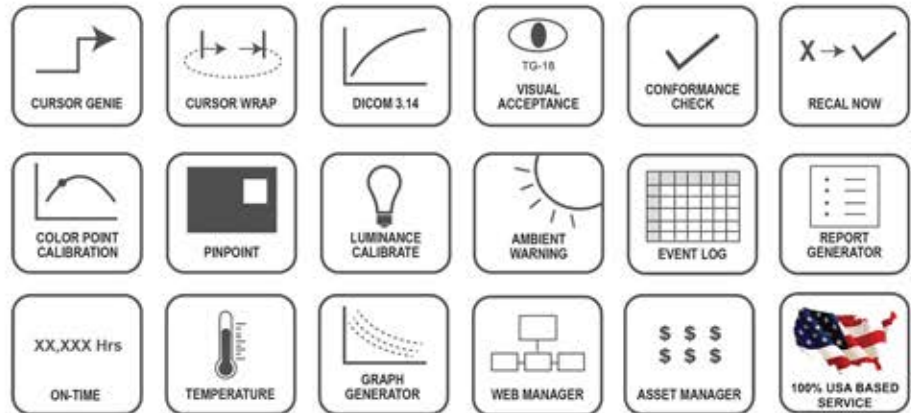

Hassle-Free Services & Support

Overcome technical challenges with our team of experienced engineers and technicians. Whether it's a simple answer or on-site troubleshooting, we can help any time, every time. Accurate and consistent presentation of images is a critical requirement for radiology displays.



DBI Service Desk
Comprehensive
Technical Support

Hot Swap
Extended Warranty &
Advanced Replacement Program

